

# Role of Transpiration Reduction during Center Pivot 2 Sprinkler Irrigation in Application Efficiency

3

Yenny Urrego-Pereira<sup>1</sup>; José Caverro<sup>2</sup>, Eva T. Medina<sup>3</sup> and Antonio Martínez-Cob<sup>4</sup>

## 4 ABSTRACT

5 The magnitude and duration of corn transpiration reduction during center pivot  
6 sprinkler irrigation was analyzed on a commercial plot. The irrigation event was  
7 defined as the period during which the pivot arm was passing over a transect AC and  
8 water droplets were moistening the plants (*moist* treatment, MT). Corn transpiration  
9 rates were measured at three spots of that transect, and, simultaneously, at another  
10 spot (*dry* treatment, DT) located about 270 m east from the transect AC. Corn  
11 transpiration rates for MT were reduced by 30 to 36% compared to DT during the  
12 irrigation event. After irrigation, the transpiration reduction lasted for 1.8 to 2.6 h, and

<sup>1</sup> Ph.D. Student, Dept. Soil and Water, Estación Experimental Aula Dei (EEAD), [Consejo Superior de Investigaciones Científicas \(CSIC\)](#), Avda. Montañana 1005, 50059 Zaragoza, Spain. E-mail: [yurrego@eead.csic.es](mailto:yurrego@eead.csic.es)

<sup>2</sup> Researcher, Dept. Soil and Water, Estación Experimental Aula Dei (EEAD), [Consejo Superior de Investigaciones Científicas \(CSIC\)](#), Avda. Montañana 1005, 50059 Zaragoza, Spain. E-mail: [jcavero@eead.csic.es](mailto:jcavero@eead.csic.es)

<sup>3</sup> Student, Unidad de Suelos y Riegos (Unidad Asociada EEAD-CSIC), Centro de Investigación y Tecnología Agroalimentaria (CITA-DGA), Avda. Montañana 930, 50059 Zaragoza, Spain. E-mail: [etmedina@aragon.es](mailto:etmedina@aragon.es)

<sup>4</sup> Researcher, Dept. Soil and Water, Estación Experimental Aula Dei (EEAD), [Consejo Superior de Investigaciones Científicas \(CSIC\)](#), Avda. Montañana 1005, 50059 Zaragoza, Spain. E-mail: [macoan@eead.csic.es](mailto:macoan@eead.csic.es)

1 ranged from 22 to 29%. The gross wind drift and evaporation losses ranged from 10  
2 to 13 % of the applied water, while the net interception losses were 2% of the applied  
3 water. Considering the observed corn transpiration reduction during and after the  
4 irrigation, the net sprinkler evaporation losses ranged from 11 to 13% of the applied  
5 water, with no relevant differences along the pivot arm.  
6

## 7 **KEYWORDS**

8 Transpiration reduction; Center pivot; Sprinkler irrigation; Water losses; Application  
9 efficiency.

## 10 **1. INTRODUCTION**

11 The search for efficiency in irrigation is one of the most important issues in irrigated  
12 agriculture due to the water scarcity and to the increase in food demand. For field  
13 crops such as alfalfa (*Medicago sativa* L.), corn (*Zea mays* L.) and winter cereals,  
14 sprinkler irrigation systems are adequate because they allow accurate scheduling of  
15 irrigation and can attain high potential efficiency with an adequate cost. Two types of  
16 sprinklers irrigation systems can be installed in the field: static and movable. Within  
17 the movable systems, the linear move laterals and the center pivots are the most  
18 important (Tarjuelo et al. 1999).

19 The use of center pivot systems has increased by more than 50% from 1986 to 1996  
20 in USA (Evans 2001). This growth continues in many irrigated areas around the  
21 world due to low investment costs per irrigated hectare, low energy and labour

1 requirements, possibility of applying agrochemicals, high degree of automation and  
2 their adaptability to different field topographies and soil textures (Allen et al. 2000).

3 Many factors affect the uniformity and irrigation efficiency of sprinkler systems which  
4 may decrease the net water application efficiency and therefore the crop yield. Some  
5 factors are technical, such as the design (spacing and height of sprinklers, nozzle  
6 number and size) and management of irrigation facilities (working pressure) (Tarjuelo  
7 1999). Environmental conditions, such as high wind speed, increase the wind drift  
8 and evaporation water losses (WDEL), which are the fraction of water droplets  
9 emitted by the sprinkler nozzles that do not reach the soil or crop being irrigated.  
10 There are also interception water losses (IL), which is the fraction of the water  
11 emitted by the sprinklers that is intercepted by crop leaves and stems and it is  
12 evaporated before reaching the soil. WDEL and IL can be summed up to get the  
13 sprinkler evaporation losses (SEL) (Martínez-Cob et al. 2008).

14 For solid-set sprinkler irrigation systems, several authors have reported that WDEL  
15 range between 0 to 20% of water applied, with greater losses during daytime  
16 irrigation (Yazar 1984; Kincaid et al. 1996; Dechmi et al. 2003; Playán et al. 2005;  
17 Martínez-Cob et al. 2008). During some particularly windy irrigation events WDEL as  
18 high as 30 to 50 % have been reported (Playán et al. 2005). For center pivot  
19 systems, Steiner et al. (1983a) reported WDEL of 15% of water applied, while Ortiz et  
20 al. (2009) reported WDEL values of 3 to 8 % during nighttime irrigations and 8 to 14  
21 % during daytime irrigations for center pivot systems using rotating or fixed spray  
22 plate sprinklers. However, IL depends mostly on the water storage capacity of a crop  
23 canopy which is a function of crop architecture. Gross IL include the stored water in

1 the crop canopy during sprinkler irrigation. Thus, Norman and Campbell (1983) and  
2 Steiner et al. (1983a) reported storage capacity values (gross IL) for corn ranging  
3 between 0.4 and 2.7 mm. Martínez-Cob et al. (2008) reported net IL of 0.3 mm for  
4 corn. Net IL was computed as the gross IL minus the transpiration reduction after the  
5 irrigation event.

6 During sprinkler irrigation the vapour pressure deficit (VPD) and temperature of the  
7 air within the crop canopy decrease due water evaporating from soil and leaf  
8 surfaces (Robinson 1970; Steiner et al. 1983b; Tolk et al. 1995; Caverro et al. 2009).  
9 This decrease of VPD during the irrigation reduces crop transpiration and  
10 evapotranspiration (ET), leading to the conservation of soil water, which would  
11 otherwise be depleted by the crop (Mc Naughton 1981; Steiner et al. 1983a).  
12 McNaughton (1981) argued that any reduction in crop ET and transpiration from a  
13 wetted area as compared with a dry area (i.e. an area not being irrigated at the same  
14 time but kept in the same conditions, including water availability) can be subtracted  
15 from the gross irrigation water losses, resulting in the net irrigation water losses. In  
16 other words, the part of SEL replacing crop ET should be regarded as beneficial. This  
17 leads to the introduction of gross ( $SEL_g$ , i.e. the sum of gross WDEL and IL) and net  
18 sprinkler evaporation losses ( $SEL_n$ , i.e. the sum of net WDEL and IL). Consideration  
19 of net evaporation losses instead of gross evaporation losses would result in an  
20 increase of application efficiency for a given application depth. This should be taken  
21 into account when calculating crop irrigation requirements.

22 Several studies have analyzed the differences in ET rates between wet and dry  
23 surfaces just after irrigation events, but very few have analyzed them during the

1 events themselves. For solid-set sprinkler irrigation, Frost and Schwalen (1960)  
2 reported an almost complete suppression of ET while Sternberg (1967) and  
3 Martínez-Cob et al. (2008) reported an average reduction of 33 % for rye-grass and  
4 corn, respectively. Thompson et al. (1993) used modelling to forecast an  
5 evapotranspiration decrease of 40% for corn during solid-set irrigation events. For  
6 linear move sprinkler irrigation systems, a reduction of ET has also been observed  
7 (Wiersma 1970; Kohl and Wright 1974). Tolk et al. (1995) reported a corn  
8 transpiration reduction of 32%, somewhat smaller than the 58 % reported by  
9 Martínez-Cob et al. (2008) for solid-set sprinkler irrigation. Thompson et al. (1997)  
10 modelled and measured transpiration and ET rates during irrigation events using  
11 linear move sprinkler irrigation systems, and showed a transpiration decrease during  
12 the irrigation events of about 80 %. To our knowledge, no previous works have  
13 reported field measurements of the changes in ET and plant transpiration during  
14 irrigation at the different pivot arm portions of a center pivot system.

15 The aim of this work was to analyze the reduction of plant transpiration during  
16 sprinkler irrigation events of corn (*Zea mays* L.) with a center pivot and how much it  
17 would contribute to increase the irrigation application efficiency. The magnitude and  
18 duration of the reduction of transpiration along different segments of a transect of the  
19 center pivot system were assessed.

20

## 1 2. MATERIAL AND METHODS

2 The experiment was performed from July to September 2008 at a commercial corn  
3 field located in Valfarta (Huesca, NE Spain). Geographical coordinates were 41°33'N  
4 latitude and 0°07'W longitude; elevation was 354 m above sea level. The long-term  
5 yearly averages of total precipitation and mean air temperature in the area are 400  
6 mm and 14.3° C, respectively. The field was planted with the cultivar Pioneer  
7 PR34N44 on 15 April 2008, the plant density at harvest was 68000 plants ha<sup>-1</sup> and  
8 the row spacing was 0.75 m. All agronomical practices (irrigation, fertilization and  
9 herbicide applications, etc.) were performed according to the farmer's technical  
10 criteria. The soil is classified as Typic Torrfluvents and the texture is silty loam.

11 The field occupied an area of 32.3 ha and was irrigated by a center pivot with impact  
12 sprinklers located in the top of the main pivot pipe. The total length of the pivot lateral  
13 was 322 m and it was divided into six spans (49.4 m length each) and a final  
14 overhang of 25.6 m length (Table 1). The diameter of the main pipe was 0.163 m. All  
15 sprinklers had a pressure regulator (Model PSR30, Senninger Irrigation Inc.,  
16 Clement, FL, USA). Table 1 lists the number of sprinklers and nozzles, the  
17 corresponding nozzle diameters, and the spacing between the sprinklers.

18 The measurements were performed in three spots of the transect AC running from  
19 north-northeast to the central axis of the pivot, corresponding to pivot arm portions 2,  
20 4, and 5 (Fig. 1). An additional spot D, located about 270 m east from the transect  
21 AC, was also monitored. This spot D was irrigated about 8 hours before the pivot arm  
22 moved over the transect AC. The center pivot was almost continuously irrigating the

1 field and it took about 31 h to complete a turn. In this work, a monitored irrigation  
2 event was the period that took the pivot to run over a distance of 18 m, 9 m either  
3 side of the transect AC. This value of 9 m was established by visual inspection of the  
4 moistening radius of the pivot sprinklers at the catch can height previously to the  
5 measurement period. Seven irrigation events were monitored in this work. Two  
6 treatments were established during each monitored irrigation event: a) *moist*  
7 treatment, measurements taken in the transect AC; b) *dry* treatment, measurements  
8 taken at the same time in the spot D.

9 The sprinkler irrigation pressure was continuously measured using pressure  
10 transducers (Model 2200/2600, Gems Basingstoke, Hampshire, UK) placed in the  
11 last sprinkler of pivot arm portions 2, 4 and 5 (Fig. 1). The pressure transducers were  
12 placed between the pressure regulator and the sprinkler, and were connected to  
13 loggers (Model Dickson ES120) which stored instantaneous pressure values every 5  
14 minutes. The average of these values ( $P_i$ , kPa) during each monitored irrigation  
15 event was used to compute the irrigation water depth applied ( $I_s$ , mm) for a given  
16 pivot arm portion during the monitored irrigation events assuming that all sprinklers of  
17 that pivot arm portion had a pressure equal to  $P_i$ . For this computation, the following  
18 expression based on the Torricelli's Theorem and the Orifice Equation (Norman et al.  
19 1990) was used:

$$20 \quad I_s = \frac{0.00035 \pi C_d P_i^{0.5} S_b^2 T_p}{A_s} \quad (1)$$

1 where:  $c_d$  is the discharge coefficient, 0.98 (Playán et al. 2005);  $T_p$  is the time (s) to  
2 complete a turn;  $A_s$  is the surface area ( $m^2$ ) irrigated by the sprinklers of the tower;  
3 the corresponding surface area for pivot arm portions 2, 4 and 5 were 23177, 53887  
4 and 69242  $m^2$ . For sprinklers with two nozzles,  $S_b^2 = d_l^2 + d_s^2$ , where  $d_l$  is the large  
5 nozzle diameter (mm);  $d_s$  is the small nozzle diameter (mm); for sprinklers with one  
6 nozzle,  $S_b^2 = d_n^2$ , where  $d_n$  is the nozzle diameter (mm).

7  $T_p$  (in s) was determined for each pivot arm portion as follows:

$$8 \quad T_p = 3600 \frac{2\pi \cdot r}{\omega} \quad (2)$$

9 where:  $r$  is the radius of the pivot at the end of the evaluated pivot arm portion (m);  
10  $\omega$  is the angular speed of the pivot ( $m \ h^{-1}$ ) computed from the time it took to the pivot  
11 to run along the distance of 18 m; this time was determined by visual inspection.

12 A line of 50 plastic catch cans (AITIIP, Zaragoza, Spain) was placed along the  
13 transect AC at a spacing of 3 m to collect the irrigation water depth that was used to  
14 determine the gross wind drift and evaporation losses ( $WDEL_g$ ) for pivot arm portions  
15 2, 4 and 5. The catch cans were conical in its lower part (200 mm length) and  
16 cylindrical in its upper part (100 mm length); the diameter of the upper part was 160  
17 mm. The catch cans were marked in mm for direct readout up to 45 mm. The catch  
18 cans were placed just above the crop canopy, and they were moved up as the crop  
19 grew along the season. The maximum catch can height was about 2.5 m. Just after  
20 the pivot has moved beyond the transect AC, the water depth at each can was read.  
21 The water collected in the catch cans was measured immediately after the irrigation



1 event finished in each pivot arm portion. The values of the cans corresponding to  
2 each pivot arm portion were averaged to get the mean collected water depth  $I_{cc}$   
3 (mm). Then  $WDEL_g$  expressed in mm, was determined as:

$$4 \quad WDEL_g = I_s - I_{cc} \quad (3)$$

5 and  $WDEL_g$ , expressed in percentage, was determined as

$$6 \quad WDEL_g = \frac{I_s - I_{cc}}{I_s} 100 \quad (4)$$

7 Three meteorological stations were installed at the transect AC (stations A, B and C,  
8 respectively) and a fourth meteorological station (station D) was installed at spot D  
9 (Fig. 1) to measure the microclimatic changes due to sprinkler irrigation. Each  
10 meteorological station was equipped with a datalogger (model CR10X, Campbell  
11 Scientific, Logan, UT, USA) that monitored a probe for air temperature and relative  
12 humidity (model HMP45C, Vaisala, Helsinki, Finland). The HMP45C probe was  
13 installed at 2.9 m above ground and its accuracy was of  $\pm 0.3^\circ\text{C}$  for air temperature  
14 and  $\pm 2\%$  for relative humidity. The air temperature and relative humidity were  
15 measured each 10 s and the 5-min averages of these two variables were  
16 continuously recorded. The 5-min values of vapour pressure deficit (VPD) were  
17 calculated from the recorded values of air temperature and relative humidity following  
18 Allen et al. (1998). The meteorological station installed at the spot D had also a cup  
19 anemometer (Vector Instruments, model A100R) and a net radiometer (Kipp &  
20 Zonen, model NR-Lite) located at about 3.0 m above ground. Data collected by both

1 sensors were also monitored each 10 s and the corresponding 5-min averages of  
2 wind speed and net radiation were recorded by the datalogger through the season.

3 During each monitored irrigation event, corn plant transpiration rates were measured  
4 every 10 minutes from 2 h before to 6 h after the pivot moved over the transect AC  
5 (Fig. 1) taking into account the different duration of the irrigation events at the  
6 measurement spots A to C (Table 3). In other words, the total measurement period  
7 during each irrigation event was different at each spot. The transpiration rates were  
8 determined from sap flow measurements using the heat balance method (Baker and  
9 van Bavel, 1987; Weibel and Boersma, 1995; Van Bavel 2005). This method was  
10 chosen because it had been previously used on corn in similar studies to this (Tolk et  
11 al. 1995; Martínez-Cob et al. 2008). At each spot, a Flow4 datalogger (Dynamax,  
12 Houston, USA) was installed to monitor, log and process data collected by four sap  
13 gauges SGB19 (Dynamax) each of them installed in a plant. These gauges are  
14 appropriate for stems of 18-23 mm in diameter. The sap gauges were moved to a  
15 second set of four plants within the same area of the field on July 25 and 14 August  
16 of 2008 to avoid any possible damage to the plants (Van Bavel 2005). Each gauge  
17 had a soft foam collar surrounding the electronics. In addition, once installed in the  
18 plant, each gauge was surrounded by a weather shield (aluminium bubble foil) such it  
19 held a cylindrical shape. The aluminium top shield was secured using insulation tape.  
20 The shield kept out water and prevented radiation from affecting readings (Van  
21 Bavel, 2005). Following this author, the datalogger was set to apply a continuous  
22 average voltage of 4.0 V while the heater resistance of the different gauges varied  
23 between 58.9 to 64.6  $\Omega$ . Van Bavel (2005) thoroughly describes the elements of the

1 gauges, the electronics, the recorded values and the equations used to process them  
2 to obtain transpiration rates at each gauge. The transpiration rates at each spot  
3 before, during and after the pivot moved over the transect AC, were determined as  
4 the average of those obtained from the four sampled plants per spot. These average  
5 transpiration rates were determined in [grams per hour](#) and transformed into  
6 [millimeters per hour](#) using the average number of plants  $\text{m}^{-2}$  measured at each spot  
7 ( $6.8 \text{ plants m}^{-2}$ ).

8 During each monitored irrigation event, the differences in corn transpiration rates  
9 between the moist and dry treatments were computed for pivot arm portions, 2, 4 and  
10 5. These differences allowed establishing different periods before, during and after  
11 each irrigation event for each pivot arm portion: 1) B1, before the irrigation event,  
12 when the difference between the individual 10-min values of both treatments was  
13 below the resolution of the sap gauges,  $0.1 \text{ mm h}^{-1}$ ; 2) B2, before the irrigation event,  
14 when the difference between the individual 10-min values of both treatments was  
15 greater than  $0.1 \text{ mm h}^{-1}$ ; 3) Du, during the irrigation event; 4) A1, after the irrigation  
16 event, when the difference between the individual 10-min values of both treatments  
17 was greater than  $0.2 \text{ mm h}^{-1}$ ; 5) A2, after the irrigation event, when the difference  
18 between the individual 10-min values of both treatments was between 0.1 and 0.2  
19  $\text{mm h}^{-1}$ ; and 6) A3, after the irrigation event, when the difference between the  
20 individual 10-min values of both treatments was less than  $0.1 \text{ mm h}^{-1}$ . In some cases,  
21 the differences between the individual 10-min values of both treatments did not meet  
22 the criteria to establish the phases B2 and A1 for a particular pivot arm and irrigation  
23 event. The computed values of air VPD were also grouped for analysis according to

1 the abovementioned phases for analysis of corn transpiration. For each phase and  
2 pivot arm portion, the corn transpiration rate and air VPD of the moist and dry  
3 treatments were compared using a paired t test and a level of significance of  $P =$   
4 0.05.

5 Following Martínez-Cob et al. (2008), the net sprinkler evaporation losses ( $SEL_n$ ) for  
6 the center pivot system of this study were estimated as:

$$7 \quad SEL_n = WDEL_n + IL_n \quad (5)$$

8 where  $WDEL_n$  and  $IL_n$  are the net wind drift and evaporation losses and the net  
9 interception losses, respectively. The  $WDEL_n$  of the center pivot of this study were  
10 estimated as the difference between  $WDEL_g$  and the reduction of evapotranspiration  
11 due to the irrigation, i.e. that occurring before (period B2) and during (phase Du) the  
12 sprinkler irrigation events (McNaughton 1981; Martínez-Cob et al. 2008):

$$13 \quad WDEL_n = WDEL_g - (ET_{red})_{di} \quad (6)$$

14 where  $(ET_{red})_{di} = (ET_{DT} - ET_{MT})_{di}$  is the reduction of evapotranspiration due to  
15 irrigation (di);  $ET_{DT}$  and  $ET_{MT}$  are the evapotranspiration rates in the treatments dry  
16 and moist, respectively, during the irrigation events.

17 In this work, transpiration rates were measured instead of evapotranspiration rates.  
18 Martínez-Cob et al. (2008) showed that the average reductions of evapotranspiration  
19 (measured with a weighing lysimeter) and transpiration (measured with sap flow  
20 gauges) during solid-set sprinkler irrigation of corn were 32% and 58%, respectively.  
21 Because the crop and climatic conditions of this work were similar to those of  
22 Martínez-Cob et al. (2008), it was assumed, as a first rough approximation, that the

1 ratio transpiration to evapotranspiration reduction (0.559) reported by those authors  
2 could be used to estimate the reduction of evapotranspiration due to irrigation  
3 (phases B2 and Du) in this work. Further studies should be performed to determine a  
4 ratio of transpiration to evapotranspiration reduction more appropriate for center  
5 pivots. Thus,

$$6 \quad (ET_{red})_{di} = 0.559 (T_{red})_{di} \quad (7)$$

7 where  $(T_{red})_{di} = (T_{DT} - T_{MT})_{b2} + (T_{DT} - T_{MT})_{du}$ , being  $(T_{DT} - T_{MT})_{b2}$  the reduction of  
8 transpiration before irrigation (phase B2) and  $(T_{DT} - T_{MT})_{du}$  the reduction of  
9 transpiration during (phase Du) the center pivot irrigation events;  $T_{DT}$  and  $T_{MT}$  are the  
10 transpiration rates in the treatments dry and moist, respectively, before and during  
11 the irrigation events.

12 The  $IL_n$  of the center pivot system of this study were estimated as:

$$13 \quad IL_n = (ET_{MT})_{ai} - (ET_{DT})_{ai} \quad (8)$$

14 where  $(ET_{MT})_{ai} - (ET_{DT})_{ai}$  is the increase of evapotranspiration in the moist treatment  
15 after (ai) the sprinkler irrigation events;  $(ET_{MT})_{ai}$  and  $(ET_{DT})_{ai}$  are the  
16 evapotranspiration rates in the treatments moist and dry, respectively, after the  
17 irrigation events. This increase of evapotranspiration after the irrigation is the net  
18 balance between the increase of evaporation of intercepted water (gross interception  
19 losses,  $IL_g$ ) and the reduction of transpiration that occurred some time after the  
20 irrigation (McNaughton 1981; Tolk et al. 1995; Martínez-Cob et al. 2008). Martínez-  
21 Cob et al. (2008) reported that  $(ET_{MT})_{ai}$  was about 35 % greater than  $(ET_{DT})_{ai}$ .  
22 Because  $IL_g$  depend mostly on the water storage capacity of a crop (Norman and

1 Campbell 1983; Steiner et al. 1983a) and the climatic and cropping conditions in this  
2 work were similar to those of Martínez-Cob et al. (2008), it was assumed that  $(ET_{MT})_{ai}$   
3 was roughly 35 % greater than the estimated  $(ET_{DT})_{ai}$  obtained from the data  
4 recorded in the meteorological station at the spot D (see Appendix A). Again further  
5 research should determine more appropriate values of these evapotranspiration rates  
6 for central pivots. Thus,  $IL_n$  was estimated as:

$$7 \quad IL_n = 1.35 (ET_{DT})_{ai} - (ET_{DT})_{ai} \quad (9)$$

8 Finally, half-hour values of several meteorological variables (wind speed and  
9 direction, solar radiation, air temperature, and relative humidity) were collected to  
10 characterize the general standard meteorological conditions occurring during the  
11 monitored irrigation events. These values were recorded at a standard weather  
12 station located over grass following Allen et al. (1998) guidelines ('grass station')  
13 about 3 km southeast from the experimental plot. This station belongs to a network  
14 named SIAR installed and managed by the Spanish Ministry of Natural, Rural and  
15 Marine Environment (MARM, 2011).

### 16 **3. RESULTS AND DISCUSSION**

17 There were some differences between the meteorological conditions recorded at the  
18 'grass station' during the irrigation events at the different dates (Table 2). The overall  
19 mean temperature during the irrigation events (phase Du) was 27.8°C, but the  
20 average temperatures ranged between 22.8 °C (13 August) and 32.5 °C (31 July).  
21 The cooler irrigation event (13 August) was also the windiest, while the hottest  
22 irrigation event (31 July) showed the highest vapour pressure deficit of the air (3.6

1 kPa). The  $WDEL_g$  are highly affected by the meteorological conditions, particularly  
2 wind speed and vapour pressure deficit (Playán et al. 2005, and references therein).  
3 Therefore, the observed differences on the meteorological conditions could explain  
4 some of the differences found for  $WDEL_g$  between the monitored irrigation events as  
5 discussed below. No precipitation was recorded neither during nor just before or just  
6 after the monitored irrigation events.

7 On average it took about 30.8 h for the pivot to complete a turn. The starting time for  
8 the irrigation was about the same for all monitored irrigation events and ranged from  
9 8:25 to 10:30 Greenwich Mean Time (Table 3). The duration of the irrigation event  
10 along the transect AC in the different monitored pivot arm portions decreased as the  
11 distance to the center of the pivot increased (Table 3). On average, the transect AC  
12 was irrigated during 1.6 h (pivot arm portion 2), 0.6 h (pivot arm portion 4) and 0.5 h  
13 (pivot arm portion 5). The average irrigation pressure in these three pivot arm  
14 portions along the monitored irrigation events was 197 kPa (coefficient of variation,  
15 CV, of 3%). This low CV value indicated a quite constant irrigation pressure during  
16 the irrigation events. On average, the irrigation pressure in the pivot arm portion 2  
17 was slightly greater (210 kPa) than that in the pivot arm portions 4 (190 kPa) and 5  
18 (192 kPa) (Table 3). The average applied water in the three monitored pivot arm  
19 portion was quite similar: 14.4 (pivot arm portion 2), 13.3 (pivot arm portion 4), and  
20 14.1 mm (pivot arm portion 5) (Table 3).

21 The time evolution of the 10-min transpiration rates and air VPD recorded at the two  
22 treatments since 2 h before until 6 h after the irrigation event of 31 July is shown in  
23 Fig. 2. These results are representative of those observed in the rest of irrigation

1 events. Before the irrigation, phase B1, the transpiration rates and air VPD for both  
2 treatments were similar. As the pivot arm was arriving near the transect AC, the  
3 transpiration rates and air VPD for the moist treatment decreased compared to those  
4 for the dry treatment (phase B2). This decrease was greater during the irrigation  
5 event (phase Du) and remained similar some time after the irrigation (phase A1).  
6 After that, the transpiration rates and air VPD for both treatments became closer and  
7 finally were similar during the phase A3. In general terms, this time evolution of the  
8 transpiration rates and air VPD observed at the two treatments during (phase Du)  
9 and after (phases A1 and A2) the irrigation events was similar to that described in  
10 previous works of sprinkler irrigation (Thompson et al. 1993; Tolk et al. 1995; Liu and  
11 Kang 2006; Martínez-Cob et al. 2008; Caverro et al. 2009). However, in this current  
12 work, the decrease of transpiration rates and air VPD for the *moist* treatment was  
13 observed just before (phase B2) the beginning of most monitored irrigation events.  
14 The existence of this phase is discussed later.

15 For all irrigation events, the values of air VPD recorded for the two treatments before  
16 irrigation (phase B1) were similar and the average difference did not exceed 0.08  
17 kPa (Fig. 3, Table 4). This difference although significant was within the expected  
18 accuracy of the air VPD computations according to the accuracy of the air  
19 temperature and relative humidity measurements. The average differences between  
20 treatments gradually increased just before and during the irrigation: 0.18 to 0.24 kPa  
21 (15.0 to 18.3%) during the phase B2, and 0.54 to 0.68 kPa (38.0 to 49.3%) during the  
22 phase Du (Fig. 3, Table 4). After the irrigation events, the average differences  
23 between treatments become gradually smaller: 0.36 to 0.45 kPa (20.7 to 26.8 %)



1 during the phase A1, 0.17 to 0.20 kPa (8.4 to 9.1 %) during the phase A2, and,  
2 finally, 0.08 to 0.10 kPa during the phase A3 when practically the air VPD became  
3 similar in both treatments (Fig. 3, Table 4).

4 Table 4 and Fig. 4 show that the transpiration rates for both treatments were not  
5 significantly different ( $P < 0.05$ ) before the irrigation during phase B1. However, both  
6 treatments were significantly different before the irrigation during phase B2. On  
7 average, the transpiration rate decrease for the moist treatment was  $0.16 \text{ mm h}^{-1}$   
8 (Fig. 4, Table 4) in each pivot arm portion. Monteith and Unsworth (2008) indicate  
9 that all the recorded values in a particular weather station, such as air temperature,  
10 relative humidity, and wind are influenced by vegetation type and characteristics that  
11 are at a distance of about 100 times the average crop height, mainly in the direction  
12 where the wind comes. As the pivot arm is continuously moving over the field, the  
13 areas nearby the transect AC have been irrigated already when the pivot arm arrives  
14 to that transect. Thus, the transpiration and VPD decreases observed before the  
15 irrigation water droplets moistened the transect AC were likely due to the effect of the  
16 microclimatic changes in these nearby areas. The influence of the predominant wind  
17 direction on the length of phase B2 is difficult to analyze because the incidence angle  
18 of wind on the pivot arm is continuously changing due to the rotation movement of  
19 the pivot. Nevertheless, the duration of phase B2 was somewhat longer for the  
20 monitored irrigation events showing east (E) predominant wind direction during that  
21 phase compared to irrigation events showing west (W) or southwest (SW)  
22 predominant wind direction (Table 5). This difference would have been even larger if  
23 the irrigation event on 13 August (the windiest by large) would have not been taken

1 into account. According to Figure 1, east winds blow over recently irrigated field  
2 areas towards the pivot arm and the transect while west or southwest winds blow  
3 against the pivot arm rotation over field areas that have been irrigated some time  
4 before and therefore should be less humid.

5  
6 The transpiration decrease in the moist treatment was greater during (phase Du) the  
7 irrigation of transect AC than that observed in the phase B2 (Fig. 4, Table 4). On  
8 average, this decrease was about 0.22-0.27 mm h<sup>-1</sup> and quite similar for the three  
9 monitored pivot arm portions. Accounting for the duration of the irrigation of transect  
10 AC, the average total transpiration for the moist treatment was 0.78 mm (pivot arm  
11 portion 2), 0.34 mm (pivot arm portion 4), and 0.26 mm (pivot arm portion 5). This  
12 was about 36% (pivot arm portion 2) and 30% (pivot arm portions 4, 5) less than the  
13 average total transpiration for the dry treatment of 1.23, 0.49, and 0.38 mm h<sup>-1</sup> for  
14 pivot arm portions 2, 4 and 5, respectively. Thus, the transpiration reduction was  
15 slightly greater for the pivot arm portion closer to center of the pivot as irrigation in  
16 this spot lasted longer. Tolk et al. (1995), using a lateral move sprinkler irrigation  
17 system, reported a transpiration reduction similar to the observed in this work, while  
18 the transpiration reduction during irrigation in solid-set sprinkler systems reported by  
19 Martínez-Cob et al. (2008) was greater. These differences likely were due to the  
20 duration of the irrigation, which was longer in the work of Martínez-Cob et al. (2008).

21 The transpiration decrease for the moist treatment just after the irrigation (phase A1)  
22 was 0.26-0.34 mm h<sup>-1</sup>, slightly greater than that observed during the irrigation (Fig. 4,  
23 Table 4). Similar transpiration reductions were observed in all three pivot arm

1 locations. Accounting for the duration of this phase, the average total transpiration for  
2 the moist treatment was 0.45 mm (pivot arm portion 2), 0.69 mm (pivot arm portion  
3 4), and 0.61 mm (pivot arm portion 5), about 38, 39 and 29% less than the average  
4 total transpiration for the dry treatment of 0.72, 1.13, and 0.86 mm for pivot arm  
5 portions 2, 4 and 5, respectively. These results are different from those reported in  
6 previous works (Tolk et al. 1995; Martínez-Cob et al. 2008) that found lower  
7 transpiration reduction after the irrigation than during the irrigation. The work of Tolk  
8 et al. (1995) was done with a linear lateral move but irrigation of the field was  
9 completed in two hours. The work of Martínez-Cob et al. (2008) was done on a solid-  
10 set system and irrigation lasted for 2 to 3 hours and there were not nearby irrigated  
11 areas after the irrigation finished. Due to the rotation movement of the center pivot it  
12 is clear that the pivot arm was irrigating nearby areas during some time after passing  
13 for the transect AC. Consequently, the microclimatic changes in the nearby areas to  
14 the transect AC (both sides) were also affecting the transpiration rates in the transect  
15 AC. Thus, the transpiration reduction in phase A1 was slightly greater than found  
16 during the irrigation and it lasted longer in the pivot than in solid-set systems  
17 (Martínez-Cob et al. 2008; Caverro et al. 2009).

18 The corn transpiration rates for the moist treatment in phase A2 after the irrigation  
19 were about 17% (pivot arm portions 2 and 4) and 16% (pivot arm portion 5)  
20 significantly lower than those for the dry treatment (Table 4, Fig. 4) but the average  
21 reduction was lower ( $<0.14 \text{ mm h}^{-1}$ ). Finally, in phase A3 after the irrigation, the  
22 differences among the treatments, although significant ( $P < 0.05$ ), were only  $0.02 \text{ mm}$   
23  $\text{h}^{-1}$  on average and thus should be considered negligible (Table 4, Fig. 4).

1 Fig 5 shows the average corn transpiration rates versus the air VPD measured at  
2 each meteorological station (three at the transect AC, moist treatment, and one at  
3 spot D, dry treatment) before (B2 phase), during (Du phase) and after (A1 phase) the  
4 center pivot sprinkler irrigation events. There was a moderate to high relationship  
5 between these two variables at both treatments according to the corresponding  
6 coefficients of determination ( $r^2$ ). These were greater during the irrigation events  
7 (phase Du), ranging from 0.75 to 0.82, than before (phase B2) and after (phase A1)  
8 the irrigations, ranging from 0.53 to 0.56 except for the pivot arm portion 4 during  
9 phase B2 ( $r^2=0.69$ ). It is clear that the direct effect of sprinkler irrigation is the  
10 increase of the air relative humidity and thus the decrease of air VPD resulting in a  
11 concomitant decrease of corn transpiration rate and this effect is greater during the  
12 irrigation event. Before and after the irrigation event this effect still exists but to a  
13 lesser extent.

14 Likewise, the magnitude of the decrease of air VPD and corn transpiration rates  
15 during the irrigation (phase Du) was dependent on the general meteorological  
16 conditions in the study area expressed by the VPD at spot D. Table 6 lists the results  
17 of the linear regressions between the decreases of air VPD and corn transpiration at  
18 each measurement spot of the transect AC versus the average air VPD recorded at  
19 the spot D during the phase Du. There was a strong relationship between the  
20 decrease of air VPD at the measurement spots of transect AC and the VPD at spot  
21 D. That relationship was not so strong (lower  $r^2$ ) for the case of the decrease of  
22 transpiration. The decrease of air VPD and corn transpiration was greater as the air

1 VPD at the dry treatment increased. Martínez-Cob et al. (2008) reported similar  
2 relationships.

3 Martínez-Cob et al. (2008) reported that the transpiration reduction for the moist  
4 treatment lasted less than 1 h after the irrigation in solid-set sprinkler systems.  
5 However, the average duration of this reduction in the center pivot studied in this  
6 work was longer. Moreover, the largest differences among the different pivot arm  
7 portions were found in the duration of transpiration reduction after the irrigation.  
8 Thus, the sum of the average duration of phases A1 and A2 (when differences  
9 among the treatments were above the resolution of the sap flow gauges used) for the  
10 monitored irrigation events was 1.8 h (pivot arm portion 2), 2.6 h (pivot arm portion  
11 4), and 2.4 h (pivot arm portion 5) (Table 4). This lower duration of transpiration  
12 reduction after the irrigation in the pivot arm 2 could be related with the lower  
13 instantaneous irrigation application rate in this part of the pivot. In any case, these  
14 effects were also affected by the meteorological conditions of each irrigation event,  
15 such as the average vapour pressure deficit of the air, and the wind speed and  
16 direction due to the influence of the irrigated nearby areas. The variability of these  
17 meteorological conditions led to the high variability of the duration of the transpiration  
18 reduction (high coefficients of variation, Table 4). The monitored irrigation events  
19 showing E predominant wind direction had a longer duration of phase A1 than the  
20 irrigation event showing S predominant wind direction during that phase (Table 5).  
21 The duration of phase A1 for the irrigation events showing SW predominant wind  
22 direction was only slightly shorter than that for irrigation events showing E  
23 predominant wind direction, particularly on 13 August, the windiest by large of all

1 studied irrigation events (Tables 2 and 5). The magnitude of the decreases of corn  
2 transpiration and air VPD was much less affected by the wind direction than by the  
3 general meteorological conditions expressed by the air VPD at the spot D (Table 5,  
4 Figure 5).

5 Table 7 shows the values of  $SEL_n$  calculated for each monitored irrigation event  
6 using the equations (5) to (9). The average values of  $WDEL_g$  were 13% (pivot arm  
7 portion 2), 11% (pivot arm portion 4) and 10% (pivot arm portion 5) of the applied  
8 water. The coefficients of variation of the water collected at the catch cans ranged  
9 from 6 to 14 % for most of irrigation events and pivot arm portions suggesting that  
10 uncertainty of the  $WDEL_g$  measurements was relatively small (Table 3). Thus, there  
11 was a slight decrease of  $WDEL_g$  towards the outer part of the pivot. The highest  
12 values of  $WDEL_g$  in the different pivot arm portions were recorded on 13 August, the  
13 windiest day (Table 2): 25 % (pivot arm portion 2), 28 % (pivot arm portion 4), and 26  
14 % (pivot arm portion 5) of the applied water. These average  $WDEL_g$  were similar to  
15 those reported for daytime sprinkler irrigation in previous works in semiarid areas for  
16 moving systems (Tolk et al. 1995; Playán et al. 2005; Ortiz et al. 2009) but lower than  
17 those found in solid-set systems (Dechmi et al. 2003; Martínez-Cob et al. 2008).

18 On average, the estimated reduction of evapotranspiration during the irrigation of the  
19 transect AC in the 7 monitored irrigation events was 0.33 mm (pivot arm portion 2),  
20 0.18 mm (pivot arm portion 4), and 0.17 mm (pivot arm portion 5) (Table 7). The  
21 corresponding  $WDEL_n$  estimated from equation (6) were: 1.5 mm (pivot arm portion  
22 2), 1.3 mm (pivot arm portions 4 and 5), which amounted 11% (pivot arm portion 2),  
23 10% (pivot arm portion 4), and 9% (pivot arm portion 5) of the applied water (Table

1 7). Thus, the evapotranspiration reduction due to irrigation represented an 18% (pivot  
2 arm portion 2) and 12% (pivot arm portions 4 and 5) of  $WDEL_g$ . In terms of the  
3 applied water, the evapotranspiration reduction due to irrigation amounted to 2.3 %  
4 (pivot arm portion 2) and 1.3 % (pivot arm portions 4 and 5). Considering these  
5 values and those of Martínez-Cob et al (2008) in solid-set systems, it seems that,  
6 during sprinkler irrigation, as the  $WDEL_g$  increases the reduction of ET (due to the  
7 reduction of plant transpiration) increases.

8 As discussed previously,  $IL_n$  is the balance between the evaporation of intercepted  
9 water and the reduction of the transpiration after the irrigation, i.e. the difference  
10 between the evapotranspiration rates of the moist and dry treatments. For a solid-set  
11 sprinkler system, Martínez-Cob et al. (2008) found that this difference between the  
12 evapotranspiration rates of both treatments was limited to a period of 1 h after the  
13 irrigation finished. Tolk et al. (1995) also found similar results for a lateral-move  
14 sprinkler system. As evapotranspiration rates were not measured in this work, it was  
15 assumed, as a rough approximation, a period of 1 h after the irrigation event in order  
16 to calculate the  $IL_n$ . After that hour, it was considered that the observed corn  
17 transpiration reduction was completely compensated by the evaporation of  
18 intercepted water such that  $IL_n$  were nil. Then, equation (9) was only applied during  
19 the first hour after the irrigation event. The  $IL_n$  estimated from equation (9) was on  
20 average 0.3 mm in all the pivot arm portions monitored (Table 7), similar to those  
21 values reported by Tolk et al. (1995) and Martínez-Cob et al. (2008).

22 Assuming the estimated  $IL_n$  values, the average  $SEL_n$  values were 1.8 mm (pivot arm  
23 portion 2) and 1.6 mm (pivot arm portions 4 and 5) (Table 7). Thus, the  $SEL_n$  would

1 represent 13%, 12%, and 11% of the applied water in the pivot arm portion 2, 4 and  
2 5, respectively (Table 7). These  $SEL_n$  values were even slightly greater than the  
3 observed  $WDEL_g$  values. Estimation of water application efficiency requires  
4 knowledge of the  $SEL_n$  (McNaughton, 1981; Tolk et al., 1995; Martínez-Cob et al.,  
5 2008). However, the results listed on Table 7 suggest that, although corn  
6 transpiration was reduced during the irrigation with center pivot, the  $WDEL_g$  could be  
7 a good estimate of  $SEL_n$ . The estimates of  $SEL_n$  listed in Table 7 suggest that the net  
8 sprinkler and evaporation losses in pivots with impact sprinklers are relatively small in  
9 terms of the applied water and slightly decrease along the pivot arm due to the  
10 differences in  $WDEL_g$  and the magnitude and duration of the transpiration reduction  
11 during and after the irrigation events in the different pivot arm portions. Due to the  
12 rough estimates of some terms in equations (7) to (9), these results must be  
13 considered as preliminary and further research is required, mainly for measuring the  
14 evapotranspiration rather than transpiration rates during and after the irrigation  
15 events.

16 There is some uncertainty regarding to the calculation of  $IL_n$  value. In this paper, the  
17 increase of evapotranspiration in the moist treatment 1 hour after the irrigation events  
18 reported by Martínez-Cob et al. (2008) has been used to estimate the  $IL_n$ , resulting in  
19 a value of about 2 % of the applied water. However, other authors reported that  $IL_n$   
20 for corn can range between 5 and 7 % for application depth between 15 and 25 mm  
21 in lateral-move sprinkler irrigation systems (Tolk et al. 1995).

22 There is a need for further research to quantify the magnitude and duration of the  
23 plants transpiration reduction for center pivot systems using other types of sprinklers,



1 for instance, rotating spray plate sprinklers, because the WDEL and the magnitude or  
2 duration of the possible transpiration reduction could be different because of the way  
3 the water is applied, closer to the crop canopy and to the ground.

4

#### 5 **4. CONCLUSIONS**

6 During irrigation of corn using a center pivot system with impact sprinklers plant  
7 transpiration was reduced by 36% for pivot arm portion 2 (close to the center) and  
8 30% for pivot arm portions 4 and 5 (far from the center). Some transpiration reduction  
9 was observed before water droplets began to moisten the corn plants. After the pivot  
10 arm has passed by the studied area transpiration continued to be reduced during 1.8  
11 h (pivot arm portion 2), 2.6 h (pivot arm portion 4) and 2.4 h (pivot arm portion 5), and  
12 amounted 27 % (pivot arm portion 2), 29 % (pivot arm portion 4), and 22 % (pivot arm  
13 portion 5).

14 The measured gross wind drift and evaporation losses ( $WDEL_g$ ) were 13, 11 and  
15 10% of applied water for pivot arm portion 2, 4 and 5, respectively. When discounting  
16 the evapotranspiration reduction during the irrigation (estimated from the measured  
17 transpiration reduction), the net wind drift and evaporation losses ( $WDEL_n$ ) were  
18 slightly lower: 11, 10 and 9% of the applied water in the pivot arm portions 2, 4 and 5.

19 The net sprinkler evaporation losses ( $SEL_n$ ) amounted 13% (pivot arm portion 2),  
20 12% (pivot arm portion 4), and 11% (pivot arm portion 5) of the applied water. These  
21  $SEL_n$  values were similar to the observed  $WDEL_g$  values so in center pivots with  
22 impact sprinklers the easily measured  $WDEL_g$  is a good estimate of total evaporation

1 losses. Thus for these systems, it would not be required to estimate  $SEL_n$  for  
2 estimation of water application efficiency.

3 Further research is required for center pivot systems using other type of water  
4 emitters.

## 5 **ACKNOWLEDGMENTS**

6 This work was supported by the project AGL-2007-66716-CO3-01 (Ministerio de  
7 Ciencia e Innovación). The authors express their gratitude to Manuel Labrador for  
8 allowing the use of his farm and his complete support during all the experiment.

9 Thanks are also due to Ana Bielsa, Miguel Izquierdo, Jesús Gaudó, Juan Manuel  
10 Acín and Ricardo Santolaria for field assistance.

11

1 **REFERENCES**

2 Allen, R.G., Pereira, L.S., Raes, D., and Smith, M. (1998). "Crop evapotranspiration:  
3 guidelines for computing crop water requirements." *FAO Irrigation and Drainage*  
4 *Paper 56*, FAO, Rome, Italy.

5 Allen, R.G., Pruitt, W.O., Businger, J.A., Fritschen, L.J., Jensen, M.E., and Quinn,  
6 F.H. (1996). "Evaporation and Transpiration." *Hydrology Handbook (Manuals and*  
7 *Reports on Engineering Practice No. 28)*. American Society of Civil Engineers  
8 (ASCE), Nueva York, EE.UU. 768 pp.

9 Allen, R.G., Keller, J., and Martin, D. (2000). "Center Pivot System Design." *The*  
10 *Irrigation Association* VA, USA. 300 p.

11 Baker, J. M., and Van Bavel, C. H. M. (1987). "Measurement of mass flow of water in  
12 the stems of herbaceous plants." *Plant, Cell Environ.*, 10, 777–782.

13 Cavero, J., Medina, E.T., Puig, M., and Martinez-Cob, A. (2009). "Sprinkler Irrigation  
14 Changes Maize Canopy Microclimate and Crop Water Status, Transpiration, and  
15 Temperature." *Agronomy Journal.*, 101(4), 854-864.

16 Cavero, J., Zaragoza, C., Suso, M.L., and Pardo, A. (1999). "Competition between  
17 maize and *Datura stramonium* in an irrigated field under semi-arid conditions."  
18 *Weed Research.*, 39, 225-240.

19 Cavero, J., Zaragoza, C., Bastiaans, L., Suso, M.L., and Pardo, A. (2000). "The  
20 relevance of morphological plasticity in the simulation of competition between  
21 maize and *Datura stramonium*." *Weed Research.*, 40, 163-180.

22

- 1 Dechmi, F., Playán, E., Caverro, J., Faci, J.M., and Martínez-Cob, A. (2003). "Wind  
2 effects on solid set sprinkler irrigation depth and yield of maize (*Zea mays*)."  
3 *Irrig. Sci.*, 22(2), 67-77.
- 4 Evans, R.G. (2001). "Center Pivot Irrigation"; *Research Report*, USDA-Agricultural  
5 Research Service: Sidney, MT, USA.
- 6 Farahani, H.J., and Bausch, W.C. (1995). "Performance of evapotranspiration models  
7 for maize-bare soil to closed canopy." *Transactions of the ASAE.*, 38 (4), 1049-  
8 1059.
- 9 Frost, K. R., and Schwalen, H. C. (1960). "Evapotranspiration during sprinkler  
10 irrigation." *Transactions of the ASAE.*, 3 (1): 18-20.
- 11 Kincaid, D.C., Solomon, K.H., and Oliphant, J.C. (1996). "Drop size distributions for  
12 irrigation sprinklers." *Transactions of the ASAE.*, 39 (3), 839-845.
- 13 Kjelgaard, J.F., Stockle, C.O., Villar, J.M., Evans, R.G., and Campbell, G.S. (1994).  
14 "Evaluating methods to estimate corn evapotranspiration from short-time interval  
15 weather data." *Transactions of the ASAE.*, 37 (6), 1825-1833.
- 16 Kohl, R.A., and Wright, J.L. (1974). "Air Temperature and Vapor-Pressure Changes  
17 caused by Sprinkler Irrigation." *Agronomy Journal.*, 66, 85-88.
- 18 Liu, H.J., and Kang, Y.H. (2006). "Effect of sprinkler irrigation on microclimate in the  
19 winter wheat field in the North China Plain." *Agric. Water Manage.*, 84, 3-19.

20

21

- 1 MARM (2011). Sistema de Información Agroclimática para el Regadío (SIAR).  
2 [http://www.marm.es/es/agua/temas/observatorio-del-regadio-espanol/sistema-de-  
4 informacion-agroclimatica-para-el-regadio/](http://www.marm.es/es/agua/temas/observatorio-del-regadio-espanol/sistema-de-<br/>3 informacion-agroclimatica-para-el-regadio/). Spanish Ministry of Natural, Rural and  
5 Marine Environment (MARM). Data retrieved on January 2011.
- 6 Martínez-Cob, A., Playan, E., Zapata, N., Caveró, J., Medina, E.T., and Puig, M.  
7 (2008). "Contribution of Evapotranspiration Reduction during Sprinkler Irrigation to  
8 Application Efficiency." *J. Irrig. Drain. Eng.*, 134,745-756.
- 9 McNaughton, K. G. (1981). "Net interception losses during sprinkler irrigation." *Agric.  
10 Meteorol.*, 24, 11-27.
- 11 Monteith, J.L., and Unsworth, M.H. (2008). *Principles of environmental physics*, 3rd  
12 edn. [Elsevier Inc.](#), Burlington, MA, USA.
- 13 Norman, E., Joyce, R., and Whittaker, M. (1990). "Advanced design and technology".  
14 3rd ed. Longman, Harlow, Essex.
- 15 Norman, J. M., and Campbell, G. (1983). "Application of a plant-environment model  
16 to problems in irrigation." *Advances in Irrigation*, D. Hillel, ed., Academic Press,  
17 New York, vol. 2, 155-188.
- 18 Ortiz, J.N., Tarjuelo, J.M., and de Juan, J.A. (2009). "Characterisation of evaporation  
19 and drift losses with centre pivots." *Agric. Water Manage.*, 96,1541-1546.
- 20 Playán, E., Salvador, R., Faci, J. M., Zapata, N., Martínez-Cob, A., and Sánchez, I.  
21 (2005). "Day and night wind drift and evaporation losses in sprinkler solid-sets  
and moving laterals." *Agric. Water Manage.*, 76, 139-159.

- 1 Robinson, F. E. (1970). "Modifying an arid microclimate with sprinklers." *Agric. Engr.*,  
2 51, 465.
- 3 SIGPAC (2011). Sistema de Información Geográfica de Parcelas Agrícolas.  
4 <http://sigpac.mapa.es/fega/visor/>. Spanish Ministry of Natural, Rural and Marine  
5 Environment (MARM). Data retrieved on January 2011.
- 6 Steiner, J. L., Kanemasu, E. T., and Clark, R. N. (1983a). "Spray losses and  
7 partitioning of water under a center pivot sprinkler system." *Transactions of the*  
8 *ASAE.*, 26 (4), 1128-1134.
- 9 Steiner, J. L., Kanemasu, E. T., and Hasza, D. (1983b). "Microclimatic and crop  
10 responses to center pivot sprinkler and to surface irrigation." *Irrig. Sci.*, 4, 201-  
11 214.
- 12 Sternberg, Y. M. (1967). "Analysis of sprinkler irrigation losses." *J. Irrig. Drain. Div.*,  
13 Proc. Am. Soc. Civil Engrs., 93 (IR4), 111-124.
- 14 Tarjuelo, J.M. (1999). *El riego por aspersión y su tecnología* (2ª Edición). Spain:  
15 Ediciones Mundi Prensa.
- 16 Tarjuelo, J.M., Montero, J., Honrubia, F.T., Ortiz, J.J., and Ortega, J.F. (1999).  
17 "Analysis of uniformity of sprinkle irrigation in a semi-arid area." *Agric. Water*  
18 *Manage.*, 40, 315-331.
- 19 Thompson, A. L., Gilley, J. R., and Norman, J. M. (1993). "A sprinkler water droplet  
20 evaporation and plant canopy model: II. Model application." *Transactions of the*  
21 *ASAE.*, 36 (3), 743-750.

1 Thompson, A. L., Martin, D. L., Norman, J. M., Tolk, J. A., Howell, T.A, Gilley, J.R  
2 and Schneider, A. D. (1997). "Testing of a water loss distribution model for  
3 moving sprinkler systems." *Transactions of the ASAE.*, 40 (1), 81-88.

4 Tolk, J. A, Howell, T. A., Steiner, J. L., Krieg, D. R., and Schneider, A. D. (1995).  
5 "Role of transpiration suppression by evaporation of intercepted water in  
6 improving irrigation efficiency." *Irrig. Sci.*, 16, 89-95.

7 Van Bavel, M. G. (2005). *Flow4 Installation and Operation Manual*, Dynamax Inc.,  
8 Houston, Texas, 191 pp.

9 Weibel, F. P., and Boersma, K. (1995). "An improved stem heat balance method  
10 using analog heat control." *Agric. Forest Meteorol.*, 75, 191–208.

11 Wiersma, J. L. (1970). "Influence of low rates of water application by sprinklers on the  
12 microclimate." *Water Resources Institute*, South Dakota State University, S.D.

13 Yazar, A. (1984). "Evaporation and drift losses from sprinkler irrigation systems under  
14 various operating conditions". *Agric. Water Manage.*, 8,439-449.

15

1 **FIGURE CAPTIONS**

2 **Fig. 1.** Layout of the experimental plot. A to C, sap flow and meteorological stations  
3 along the transect AC (moist treatment). D, sap flow and meteorological station at  
4 the dry treatment. Mp, pivot arm. P<sub>r</sub>, irrigation pressure transducers. R<sub>1-6</sub>, radius  
5 from each pivot tower to the center pivot. M, the movement of the center pivot in  
6 counter clock wise direction. (SIGPAC 2011).

7 **Fig. 2.** 10-min average corn transpiration rates and vapour pressure deficit of air  
8 (VPD) at pivot arm portions 2, 4 and 5, from 2 h before until 6 h after the irrigation  
9 event monitored on 31 July. MT, moist treatment. DT, dry treatment. The vertical  
10 continuous lines indicate the start and the end of the irrigation over the transect  
11 AC (water droplets falling over the plants). The vertical dashed lines indicate the  
12 periods during which transpiration rates were different between the two  
13 treatments. Du, irrigation of the transect AC; B1 and B2, before the irrigation; A1  
14 to A3, after the irrigation. The "Material and methods" section describes how  
15 these different phases were established.

16 **Fig. 3.** Vapour pressure deficit (VPD) of the air measured in the dry (DT) treatment  
17 versus VPD of the air measured in the moist (MT) treatment during the seven  
18 monitored irrigation events. B1 and B2, before irrigation; Du, during irrigation; A1  
19 to A3, after irrigation. PAP, Pivot Arm Portion.

20 **Fig. 4.** Corn transpiration rates in the seven monitored irrigation events for the dry  
21 (DT) treatment versus those in the moist (MT) treatment in the different pivot arm



1 portions (PAP). B1 and B2, before the irrigation; Du, during the irrigation; A1 to  
2 A3, after the irrigation.

3 **Fig. 5.** Relationship between the average transpiration rates of maize and the  
4 average VPD of the air measured before (B2 phase), during (Du phase) and after  
5 (A1 phase) the center pivot sprinkler irrigation events for the moist (MT) and dry  
6 (DT) treatments in the different pivot arm portions (PAP).

7

8

1 **APPENDIX A. DETERMINATION OF CORN EVAPOTRANSPIRATION AT DRY**  
2 **TREATMENT**

3 The 5-min averages of the meteorological variables recorded at spot D were used to  
4 estimate corn evapotranspiration at the dry treatment,  $ET_{DT}$ , during each monitored  
5 irrigation event using the Penman-Monteith equation directly applied to the corn crop  
6 (Allen et al. 1996):

$$7 \quad ET_{DT} = \frac{300}{10^6 \lambda} \frac{\Delta(R_n - G) + \rho_a c_p VPD/r_a}{\Delta + \gamma \left(1 + \frac{r_c}{r_a}\right)} \quad (10)$$

8 where:  $\lambda$ , latent heat of vaporization ( $MJ \text{ Kg}^{-1}$ );  $R_n$ , net radiation ( $W \text{ m}^{-2}$ );  $G$ , soil heat  
9 flux ( $W \text{ m}^{-2}$ );  $\Delta$ , slope of the saturation vapour pressure curve versus the temperature  
10 ( $\text{kPa } ^\circ\text{C}^{-1}$ );  $\rho_a$ , air density ( $\text{Kg m}^{-3}$ );  $c_p$ , specific heat of the air ( $\text{J Kg}^{-1} \text{ } ^\circ\text{C}^{-1}$ );  $VPD$ ,  
11 vapour pressure deficit ( $\text{kPa}$ );  $r_a$ , aerodynamic resistance ( $\text{s m}^{-1}$ );  $r_c$ , bulk stomatal  
12 (canopy) resistance ( $\text{s m}^{-1}$ );  $\gamma$ , psychrometric constant ( $\text{kPa } ^\circ\text{C}^{-1}$ ).

13 The variables  $\lambda$ ,  $\Delta$ ,  $\rho_a$ ,  $\gamma$ , and  $c_p$  were estimated from measured air temperature and  
14 relative humidity following standard procedures described by Allen et al. (1998).  $G$   
15 was estimated from net radiation following Allen et al. (1996):

$$16 \quad G = 0.4 e^{-0.5LAI} R_n \quad (11)$$

17 where LAI is the daily leaf area index estimated from measured crop height as  
18 suggested by Allen et al. (1996).

1 The aerodynamic resistance  $r_a$  ( $s\ m^{-1}$ ) to vapour transfer was estimated following  
2 Allen et al. (1996):

$$3\ r_a = \frac{\left[ \ln\left(\frac{z_u - d}{z_{0m}}\right) \right] \left[ \ln\left(\frac{z_h - d}{z_{0h}}\right) \right]}{k^2 u_{zu}} \quad (12)$$

4 where:  $u_{zu}$  is the wind speed ( $m\ s^{-1}$ ) measured at a height  $z_u$ ;  $k$  is the von Karman's  
5 constant (0.41);  $z_u$  and  $z_h$  are the measurement heights (m) above ground of wind  
6 speed, and air temperature and relative humidity, respectively; and  $d$ ,  $z_{0m}$ , and  $z_{0h}$  (all  
7 three in m) are the zero-plane displacement and the roughness lengths for  
8 momentum and heat transfer, respectively, estimated (daily) as a function of crop  
9 height ( $h_c$ ) and LAI following Farahani and Bausch (1995) and Kjelgaard et al. (1994):

$$10\ d = 1.1 h_c \ln\left[1 + (c_d LAI)^{1/4}\right] \quad (13)$$

$$11\ z_{0m} = 0.3 h_c (1 - d/h_c) \quad (14)$$

12 and,

$$13\ z_{0h} = 0.2 z_{0m} \quad (15)$$

14 where  $c_d$  is the mean drag coefficient for individual leaves (0.07). Eq. (14) was  
15 chosen as the product ( $c_d LAI$ ) was above 0.2 (Farahani and Bausch 1995) due to  
16 the LAI values around 4.0 estimated during the monitoring period as crop height was  
17 about 2.5 m.

18 The bulk canopy resistance ( $s\ m^{-1}$ ),  $r_c$ , was estimated following Farahani and Bausch  
19 (1995):

$$1 \quad r_c = \left\{ c_0 \text{LAI} + \frac{c_1}{c_2 C} \ln \left[ \frac{1 + c_2 C R_s}{1 + c_2 C R_s \exp(-C \text{LAI})} \right] \right\}^{-1} \quad (16)$$

2 where:  $R_s$  is the incoming solar radiation ( $\text{W m}^{-2}$ ) estimated from the linear regression  
3 between the measured net radiation at the spot D and the incoming solar radiation  
4 measured in a nearby weather station also located at Valfarta;  $c_0$  is the minimum  
5 stomatal conductance ( $0.0005 \text{ m s}^{-1}$ );  $c_1$  and  $c_2$  are constants defined as  $c_1 = 3.2\text{E-}5$   
6  $\text{m s}^{-1}$  and  $c_2 = 5.7\text{E-}5 \text{ m s}^{-1}$ ; and  $C$  is the light extinction coefficient, assumed to be  
7 0.50 as suggested by Cavero et al. (1999, 2000) for similar crop and climatic  
8 conditions to those in this work.

9

Table 1. General characteristics of the center pivot system.

Pivot arm portion	Number of sprinklers			Nozzle diameters	Distance <sup>a</sup>	Spacing between sprinklers
	With 1 nozzle	With 2 nozzles	Total			
				mm	m	m
1	5		5	2.8 - 4.8	48.3	9.3
2	7		7	4.8 - 5.4	97.8	7.0
3	2	6	8	4.2 - 5.8	147.2	6.2
4		8	8	4.8 - 6.0	196.6	6.2
5	12	4	16	4.2 - 6.0	246.1	3.1
6		16	16	4.4 - 5.6	295.5	3.1
Wing		8	8	4.6 - 5.4	321.1	2.9

<sup>a</sup> Distance of the corresponding tower to the central axis of the pivot.

Table 2. Average meteorological conditions recorded during the monitored irrigations events at the nearby weather station of Valfarta<sup>a</sup>.

Date	Air temperature °C	Air vapour pressure deficit kPa	Wind speed m s <sup>-1</sup>	Solar radiation W m <sup>-2</sup>
July 24	28.0	1.9	2.0	742
July 31	32.5	3.6	1.5	880
August 6	29.9	2.6	1.8	772
August 13	22.8	1.7	3.5	723
August 21	27.4	1.7	2.0	780
August 28	26.6	1.6	0.9	768
September 10	27.3	1.8	1.6	651

<sup>a</sup> It belongs to the Spanish Irrigation Advisory System  
(<http://www.marm.es/es/agua/temas/observatorio-del-regadio-espanol/sistema-de-informacion-agroclimatica-para-el-regadio/>)

Table 3. General characteristics of the monitored irrigation events in the different parts of the center pivot during the period that the pivot arm was moving over the transect AC (phase Du).

Pivot arm portion	Date (dd/mm)	Starting time <sup>a</sup> ----- h -----	Duration -----	Pressure		Applied water (l <sub>s</sub> ) mm	Collected water depth (l <sub>cc</sub> )	
				Mean kPa	CV <sup>b</sup> %		Mean mm	CV %
2	24/07	08:25	1.70	208		14.6	13.0	18
	31/07	09:35	1.62	218	0.8	14.9	13.4	15
	06/08	09:00	1.62	214	0.5	14.8	12.6	14
	13/08	09:05	1.55	216	0.6	14.2	10.6	19
	21/08	09:20	1.55	198	1.0	13.6	12.8	14
	28/08	09:45	1.62	207	1.0	14.5	12.3	12
	10/09	10:15	1.62	208	3.3	14.6	13.3	10
4	24/07	08:40	0.62	193	2.2	13.6	11.9	7
	31/07	09:55	0.60	197	1.6	13.8	12.3	11
	06/08	09:15	0.60	194	1.9	13.6	12.3	10
	13/08	09:20	0.57	197	1.0	13.1	9.5	13
	21/08	09:35	0.57	177	2.4	12.4	11.9	6
	28/08	10:00	0.60	181	1.9	13.2	11.9	8
	10/09	10:30	0.60	194	1.6	13.7	12.9	7
5	24/07	08:40	0.50	195	0.3	14.4	13.3	12
	31/07	09:55	0.48	199	1.3	14.5	13.4	14
	06/08	09:20	0.48	197	1.5	14.5	12.9	14
	13/08	09:20	0.45	200	0.7	13.9	10.4	13
	21/08	09:40	0.45	174	0.8	13.0	12.6	10
	28/08	10:00	0.48	179	0.9	13.8	12.6	12
	10/09	10:30	0.48	202	0.6	14.7	13.3	10

<sup>a</sup> Greenwich Mean Time.

<sup>b</sup> CV, coefficient of variation.

Table 4. Average maize transpiration rate (T) and vapour pressure deficit of the air (VPD) of moist (MT) and dry (DT) treatments and the corresponding differences between them before (phases B1 and B2), during (Du) and after (phases A1, A2 and A3) the monitored irrigation events in the different pivot arm portion (PAP). The duration of these phases is also listed.

Phase	PAP	N <sup>a</sup>	Transpiration			VPD			Duration	
			T <sub>MT</sub>	T <sub>DT</sub>	T <sub>MT</sub> -T <sub>DT</sub>	VPD <sub>MT</sub>	VPD <sub>DT</sub>	VPD <sub>MT</sub> -VPD <sub>DT</sub>	mean	CV <sup>b</sup>
			----- mm h <sup>-1</sup> -----			----- kPa -----			h	%
B1	2	7	0.38	0.39	-0.01 <sup>ns</sup>	0.89	0.96	-0.08 <sup>s</sup>	1.0	53
	4	7	0.38	0.39	-0.01 <sup>ns</sup>	0.94	1.00	-0.06 <sup>s</sup>	0.7	60
	5	7	0.46	0.48	-0.02 <sup>ns</sup>	0.92	0.98	-0.06 <sup>s</sup>	1.7	59
B2	2	3	0.48	0.63	-0.15 <sup>s</sup>	1.07	1.31	-0.24 <sup>s</sup>	1.0	76
	4	7	0.41	0.60	-0.18 <sup>s</sup>	1.02	1.20	-0.18 <sup>s</sup>	1.0	66
	5	3	0.49	0.64	-0.16 <sup>s</sup>	1.15	1.38	-0.23 <sup>s</sup>	1.2	75
Du	2	7	0.48	0.75	-0.27 <sup>s</sup>	0.88	1.42	-0.54 <sup>s</sup>	1.6	4
	4	7	0.51	0.73	-0.22 <sup>s</sup>	0.70	1.38	-0.68 <sup>s</sup>	0.7	0
	5	7	0.53	0.76	-0.23 <sup>s</sup>	0.72	1.34	-0.62 <sup>s</sup>	0.5	0
A1	2	7	0.54	0.86	-0.33 <sup>s</sup>	1.38	1.74	-0.36 <sup>s</sup>	0.8	65
	4	6	0.53	0.87	-0.34 <sup>s</sup>	1.23	1.62	-0.39 <sup>s</sup>	1.3	37
	5	5	0.63	0.89	-0.26 <sup>s</sup>	1.23	1.68	-0.45 <sup>s</sup>	1.0	56
A2	2	7	0.71	0.85	-0.14 <sup>s</sup>	2.04	2.23	-0.19 <sup>s</sup>	1.0	88
	4	7	0.65	0.79	-0.14 <sup>s</sup>	2.00	2.20	-0.20 <sup>s</sup>	1.3	52
	5	7	0.69	0.82	-0.13 <sup>s</sup>	1.86	2.03	-0.17 <sup>s</sup>	1.4	53
A3	2	7	0.72	0.74	-0.02 <sup>s</sup>	2.25	2.35	-0.10 <sup>s</sup>	2.6	22
	4	7	0.68	0.70	-0.02 <sup>s</sup>	2.17	2.26	-0.10 <sup>s</sup>	3.6	17
	5	7	0.67	0.70	-0.02 <sup>s</sup>	2.17	2.25	-0.08 <sup>s</sup>	4.1	19

<sup>a</sup> N, number of irrigation events.

<sup>b</sup> CV, coefficient of variation.

For each variable, phase and pivot arm portion, differences between the moist and dry treatments were non significant (<sup>ns</sup>) or significant (<sup>s</sup>) according to a paired t test and a level of significance of P = 0.05.



Table 5. Average reduction of vapour pressure deficit of the air ( $\Delta$ VPD) and maize transpiration ( $\Delta$ T) and average duration of that reduction for the different monitored irrigation events grouped according to the predominant wind direction (WD) before (phase B2) and after (phase A1) the irrigation events. Average wind speed for those groups is also listed.

Phase	WD <sup>a</sup>	Date	Wind Speed	Observed decreases		
				$\Delta$ VPD	$\Delta$ T	Duration
				dd/m	m s <sup>-1</sup>	KPa
B2	E	24/7, 31/7, 06/8, 21/8, 28/8	1.7	0.20	0.17	1.0
	SW	10/9, 13/8	2.9	0.24	0.14	0.8
A1	E	24/7, 31/7, 06/8, 21/8	1.6	0.41	0.35	1.2
	S	28/8	0.9	0.49	0.26	0.4
	SW	10/9, 13/8	2.4	0.29	0.26	1.0

<sup>a</sup> Recorded at the nearby 'grass station': E, east (67.5 to 112.5°); S, south (157.5 to 202.5°); southwest, SW (202.5 to 247.5°); west, W (247.5 to 292.5°).

Table 6. Analysis of linear regression ( $y=b_0+b_1 x$ ) between the VPD averages recorded at station D (independent variable  $x$ ) and the average decreases of vapour pressure deficit ( $\Delta$ VPD) and transpiration rate ( $\Delta$ T) (dependent variables  $y$ ) observed during the irrigation events (phase Du).  $b_0$  and  $b_1$ , intercept and slope of the linear regression, respectively.  $r^2$ , coefficient of determination. PAP, pivot arm portion.

Variable Y	Variable X	PAP	Linear Regression		
			$b_0$	$b_1$	$r^2$
$\Delta$ VPD	VPD	2	-0.21	0.53	0.87
		4	-0.14	0.48	0.83
		5	-0.30	0.68	0.87
$\Delta$ T	VPD	2	-0.10	0.26	0.61
		4	-0.16	0.27	0.79
		5	0.07	0.12	0.51

Table 7. Irrigation applied water ( $I_s$ ), evapotranspiration reduction during the irrigation ( $(ET_{red})_{di}$ ), gross and net wind drift and evaporation losses (WDEL), net interception losses ( $IL_n$ ) and net sprinkler evaporation losses ( $SEL_n$  in mm and % of  $I_s$ ) in the different irrigation events in the different parts of the center pivot.

Pivot arm portion	Date	$I_s$	$(ET_{red})_{di}$	WDEL		$IL_n$	$SEL_n$	$SEL_n$
				Gross	Net			
				mm				
2	July 24	14.6	0.25	1.5	1.3	0.3	1.6	11
	July 31	14.9	0.58	1.5	1.0	0.3	1.3	9
	August 6	14.8	0.47	2.2	1.8	0.3	2.1	14
	August 13	14.2	0.15	3.5	3.4	0.3	3.7	26
	August 21	13.6	0.31	0.7	0.4	0.3	0.7	5
	August 28	14.5	0.17	2.2	2.1	0.3	2.3	16
	September 10	14.6	0.07	1.2	1.2	0.2	1.4	9
	Mean	14.4	0.33	1.9	1.5	0.3	1.8	13
4	July 24	13.6	0.13	1.7	1.6	0.2	1.8	13
	July 31	13.8	0.37	1.4	1.0	0.3	1.4	10
	August 6	13.6	0.20	1.4	1.2	0.3	1.5	11
	August 13	13.1	0.14	3.6	3.5	0.3	3.8	29
	August 21	12.4	0.17	0.5	0.4	0.2	0.6	5
	August 28	13.2	0.14	1.3	1.2	0.2	1.4	11
	September 10	13.7	0.10	0.7	0.6	0.2	0.8	6
	Mean	13.3	0.18	1.5	1.3	0.3	1.6	12
5	July 24	14.4	0.12	1.1	1.0	0.2	1.3	9
	July 31	14.5	0.24	1.2	0.9	0.3	1.2	9
	August 6	14.5	0.16	1.6	1.4	0.3	1.7	12
	August 13	13.9	0.07	3.6	3.5	0.3	3.8	27
	August 21	13.0	0.07	0.3	0.3	0.3	0.5	4
	August 28	13.8	0.07	1.2	1.1	0.3	1.4	10
	September 10	14.7	0.04	1.4	1.3	0.2	1.5	11
	Mean	14.1	0.17	1.5	1.3	0.3	1.6	11



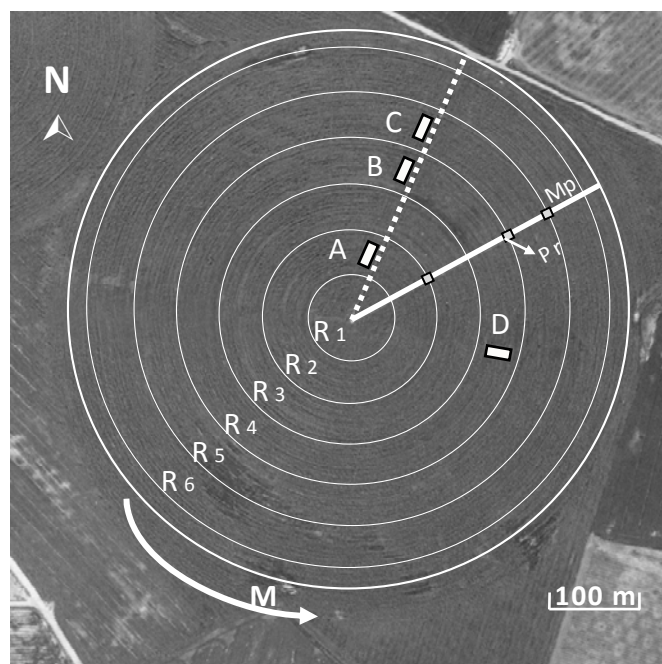



Figure 1. Layout of the experimental plot. A to C, sap flow and meteorological stations along the transect AC (moist treatment). D, sap flow and meteorological station at the dry treatment. Mp, pivot arm. Pr, irrigation pressure transducers. R<sub>1-6</sub>, radius from each pivot tower to the center pivot. M, the movement of the center pivot in counter clock wise direction.

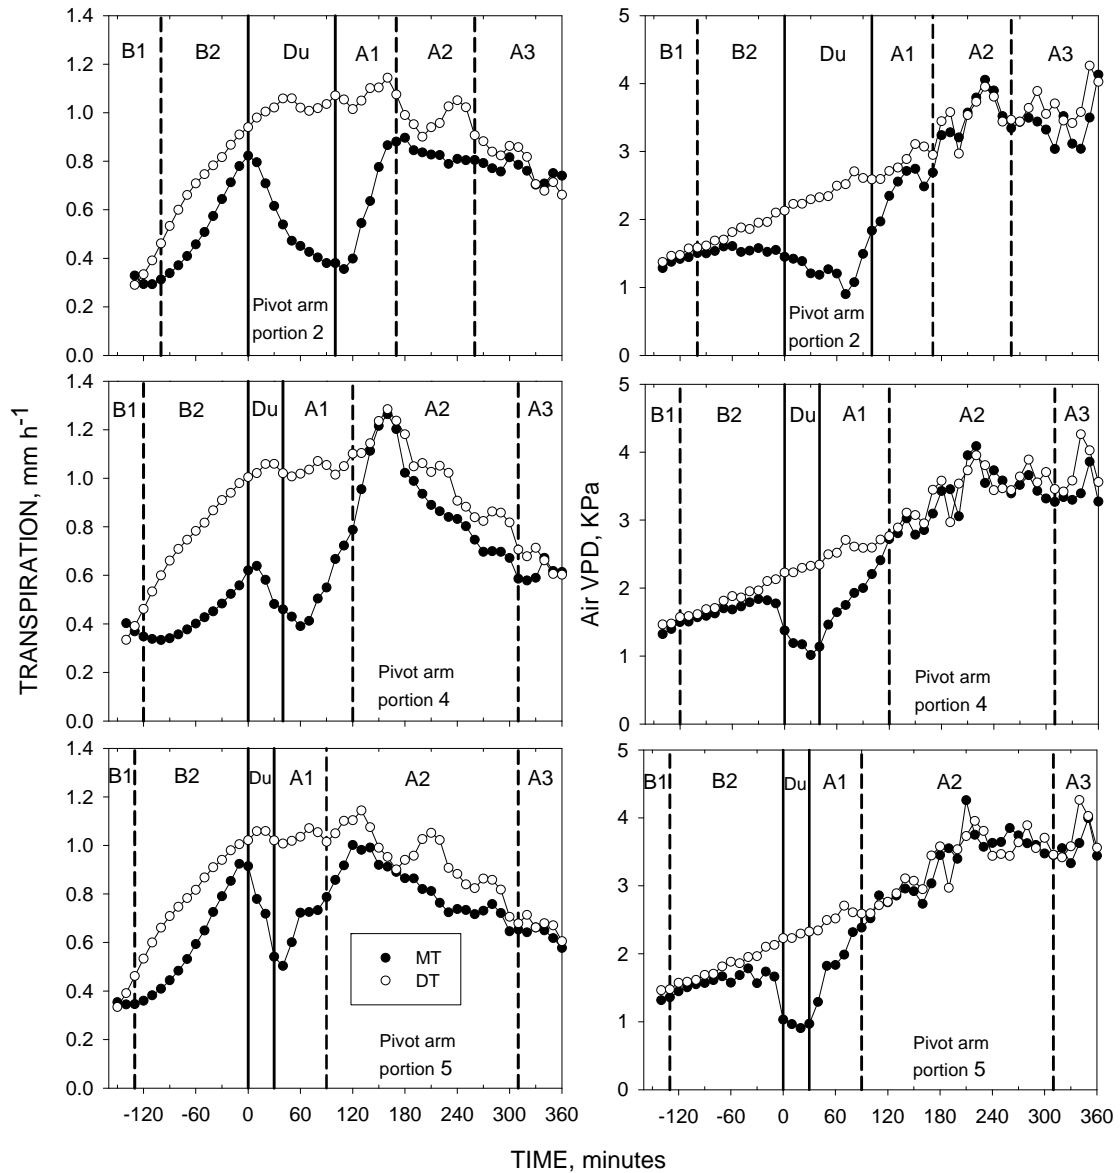


**Fig. 2.** 10-min average corn transpiration rates and vapour pressure deficit of air (VPD) at pivot arm portions 2, 4 and 5, from 2 h before until 6 h after the irrigation event monitored on 31 July. MT, moist treatment. DT, dry treatment. The vertical continuous lines indicate the start and the end of the irrigation over the transect AC (water droplets falling over the plants). The vertical dashed lines indicate the periods during which transpiration rates were different between the two treatments. Du, irrigation of the transect AC; B1 and B2, before the irrigation; A1 to A3, after the irrigation. The “Material and methods” section describes how these different phases were established.

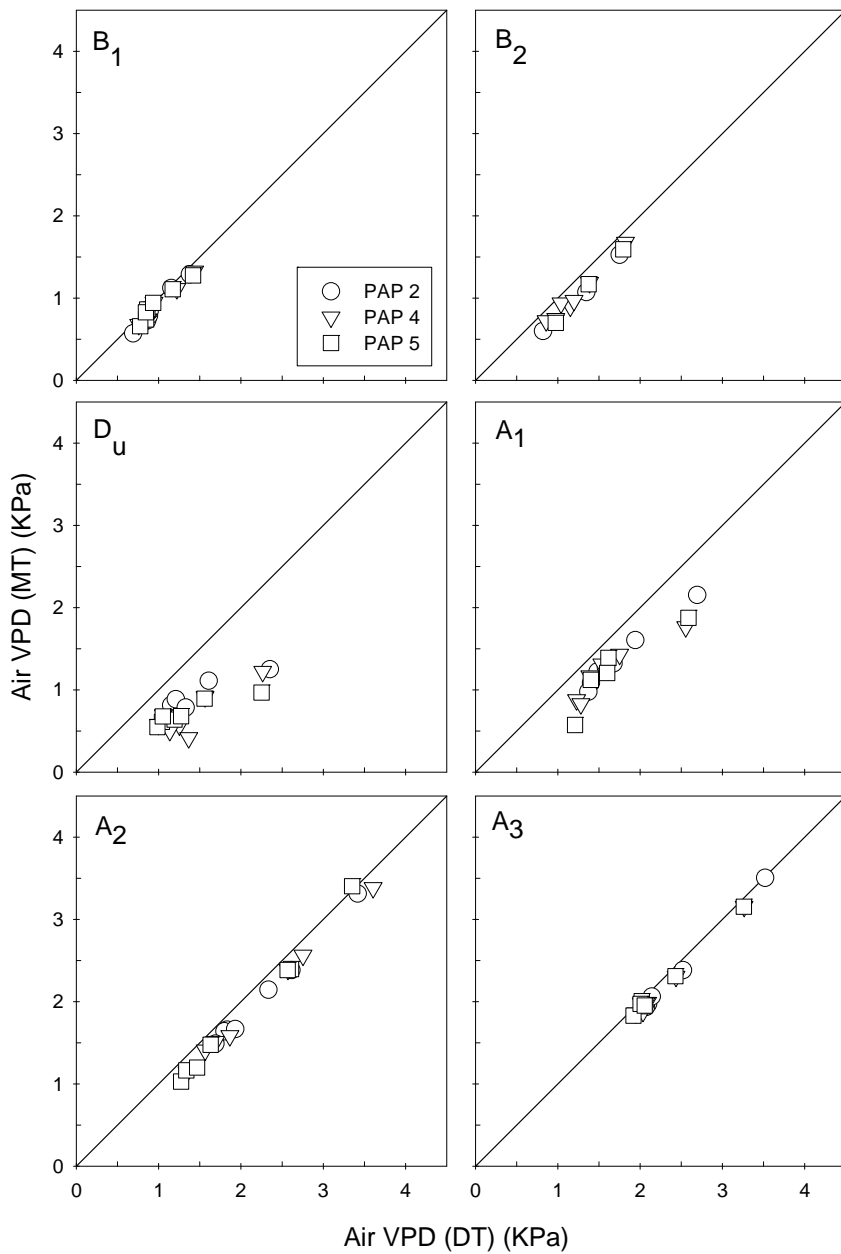

**Fig. 3.** Vapour pressure deficit (VPD) of the air measured in the *dry* (DT) treatment versus VPD of the air measured in the *moist* (MT) treatment during the seven monitored irrigation events. B<sub>1</sub> and B<sub>2</sub>, before irrigation; D<sub>u</sub>, during irrigation; A<sub>1</sub> to A<sub>3</sub>, after irrigation. PAP, Pivot Arm Portion.

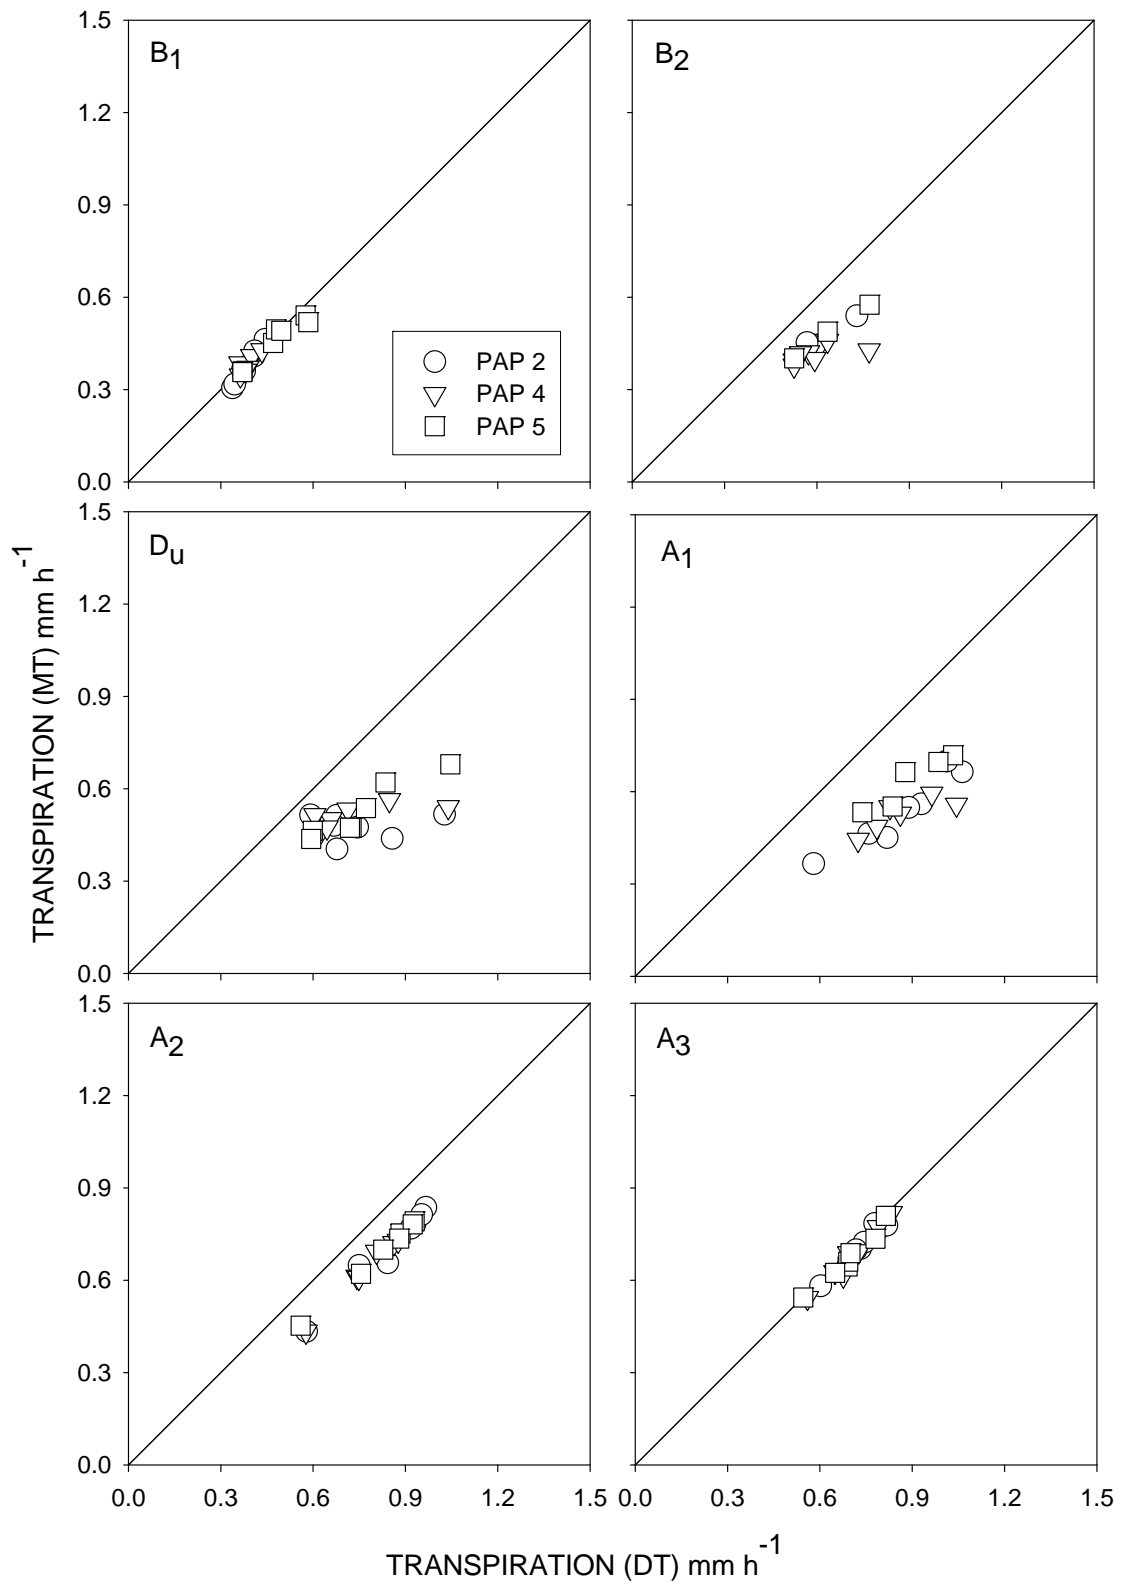

**Fig. 4.** Corn transpiration rates in the seven monitored irrigation events for the *dry* (DT) treatment versus those in the *moist* (MT) treatment in the different pivot arm portions (PAP). B1 and B2, before the irrigation; Du, during the irrigation; A1 to A3, after the irrigation.

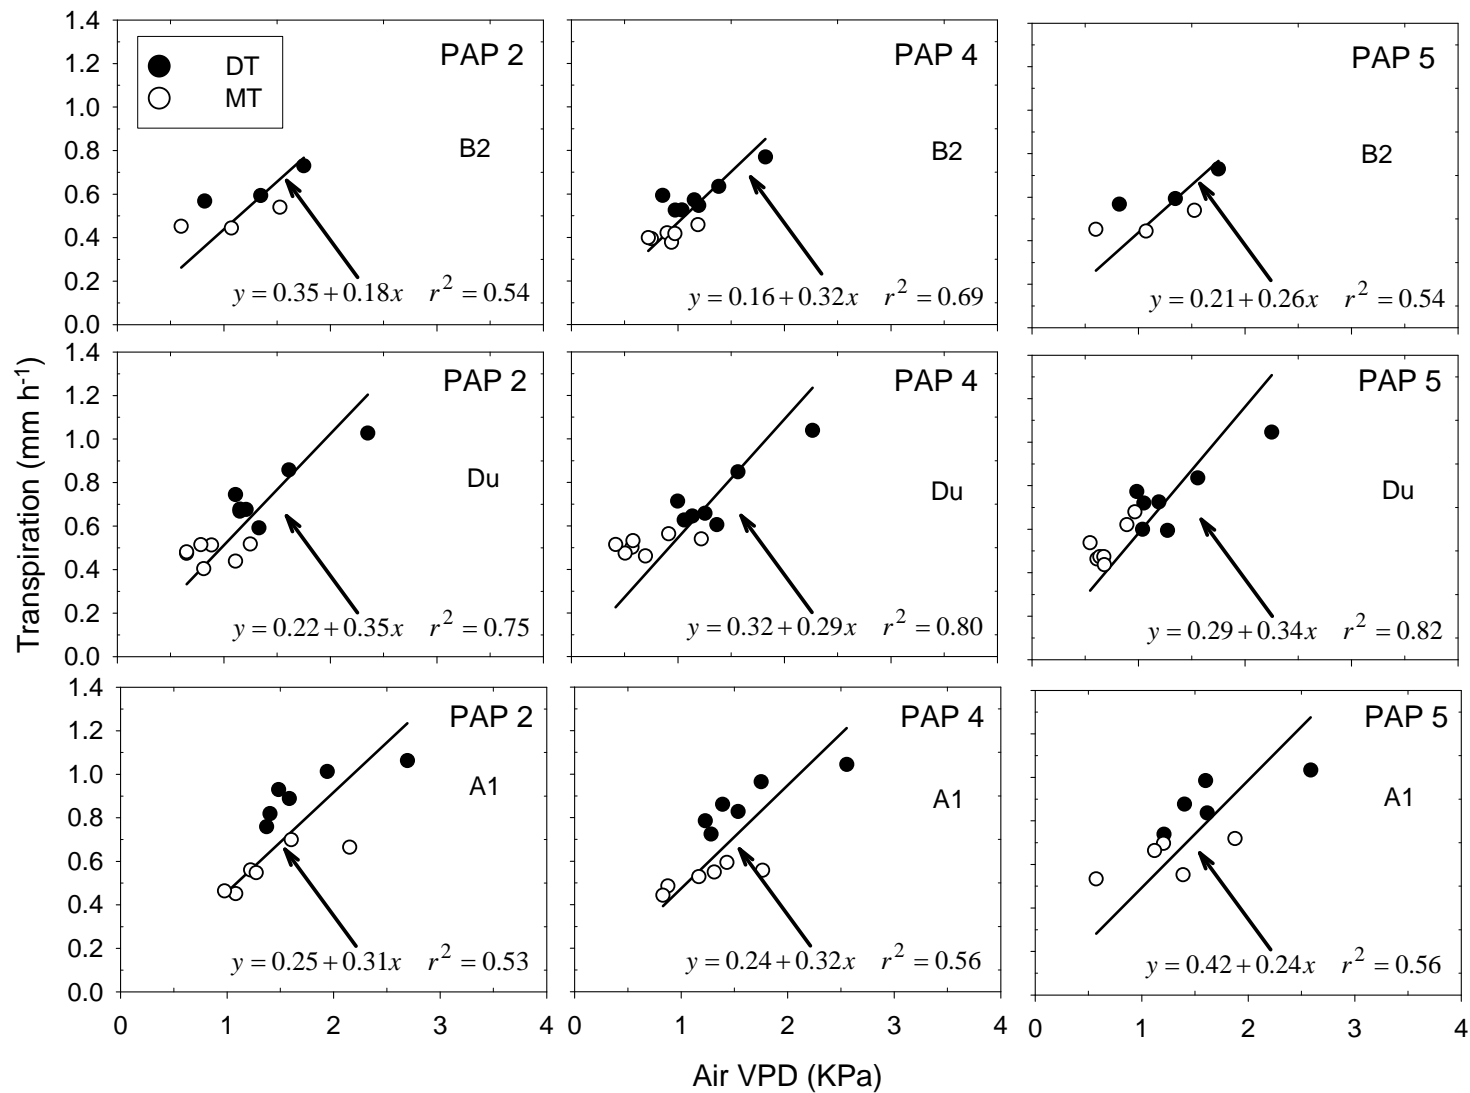

**Fig. 5.** Relationship between the average transpiration rates of maize and the average VPD of the air measured before (B2 phase), during (Du phase) and after (A1 phase) the center pivot sprinkler irrigation events for the *moist* (MT) and *dry* (DT) treatments in the different pivot arm portions (PAP).